


ITEM	QTY	PART NO.	DESCRIPTION
1	1		WIRE, NC, 3 COND, 22#F, TE/SS BRAID/TE
2	1		TUBING, 0.25" DIA X 0.020" WT
3	1		ELEMENT 100 Pt A CLASS 385,2.3x2mm TF
4	1		HEAT SHRINK, 1.25" LONG

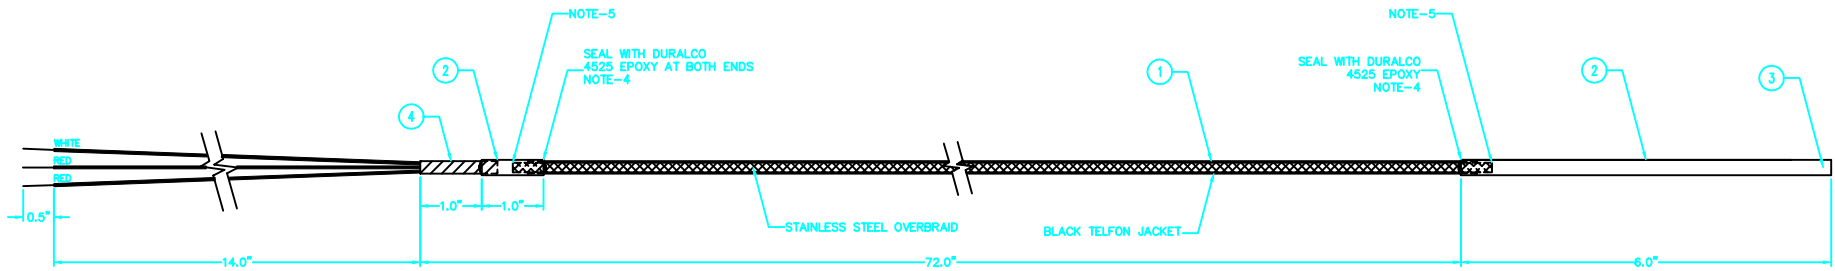

- NOTES:**
1. PLATINUM RTD, 3-WIRE, 100 OHM TO DIN 43760
 2. RATED -50°C TO +200°C.
 3. WATERPROOF CONSTRUCTION.
 4. LEVEL OFF EPOXY SEALS AT ENDS OF TUBING.
 5. LEAVE EXCESS UNCOVERED BRAID FOR BONDING WITH EPOXY & TUBING.

AO	ORIGINAL	03-16-05
REV	DESCRIPTION	DATE

		#14, 6120 - 11th Street S.E. CALGARY, ALBERTA T2H 2L7 TEL: (403) 735-8555 FAX: (403) 735-8559	
CUSTOMER: NEXTRON CORPORATION		SCALE: 1:2	
DRAWING TITLE: RTD PROBE, 3W, TEFLON INSULATED SS OVERBRAID		SHEET NO.: 1 OF 1	
DRAWING NUMBER: FABRICATION (BDA RTD: NEXTRON-1)		DRAWING NO.: 902004	
PRODUCT NAME: RTD-7		DATE: 03-16-05	
PART NO.: 9006-0001_1		DRAWN/DESIGNED BY: T. THAI	
ENGINEER: Y. ZENG		WORK ORDER NO.: N.A.	
CHECKED BY:		FILE: 902004A1.DWG	